



TMCF06 Metallized Polyester Film Capacitor Box Type(MEB)

Features

- Box type provides the identical outer appearance.
- Wide capacitance range, small size.
- Long life due to self-healing effect.
- Suitable for block, by-pass and coupling of DC and signal to VHF range.
- Widely used in filter, noise suppression and low pulse circuits.




Configuration

Non-inductive, wound with metallized polyester film as dielectric and Electrode, copper-clad steel leads and encapsulated in a plastic case sealed with epoxy resin.

Specifications & Outline Drawing

Reference Standard	GB / T7332-1996	
Climatic Category	40/85/21	
Rated Voltage	100V, 160V, 250V, 400V, 630V, 1000V	
Capacitance Range	0.010-10.0 μ F	
Capacitance Tolerance	\pm 5%(J), \pm 10%(K), \pm 20%(M)	
Voltage Proof	1.6U _r (5s)	
Dissipation Factor	\leq 1.0%(20 $^{\circ}$ C, 1KHz)	
Insulation Resistance	\geq 7500M Ω (CR \leq 0.33 μ F) \geq 2500s (CR $>$ 0.33 μ F)	(20 $^{\circ}$ C, 1min)

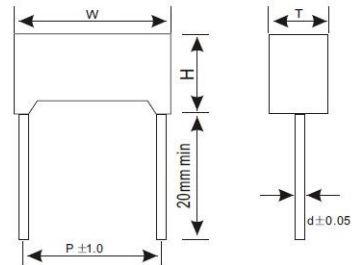

Dimensions

0.22MFD 1000VDC			
W	H	T	P
Max	Max	Max	± 1
13	13	8	10.0



a2zelectronic.com

Sourcing Simplified

