

buy electronic components online now.....@

a2zelectronic.com



Capacitors



Diodes



**Terminal Blocks
PCB Mountable**



Transistors



LCD Displays



Instrument Cooling Fan



**MOV's
Metal Oxide Variators**



IC's



Fuses

All Industrial Electronic components Available.

**Capacitors (D.C. & A/C)
IGBTs
MOSFETs
Semiconductors
SCRs
Switches**

**Relays
Connectors
Terminal Blocks
LCD's
Resistors
Transistors, Buzzers**

**7 Seg LED Displays
Instrument cooling Fans
Fuse & Fuse Holder
MOV's, Heat Sinks, Diodes
IC's, Knob's, Trim pots,
LED Power Supply...etc.,**

support@a2zelectronic.com

91 99 4417 4417

KT-207

POWER RELAY

KYOTA



34.5 x 34.5 x 51.8

- Compact high Performance
- LED Indication optional
- DIN Rail Mounting Socket Available
- Conform to RoHS

CONTACT DATA

Contact Form	2C/3C
Contact Material	Silver Alloy
Contact Rating Rated Voltage	230VAC / 24VDC
Max. Continuous Current @230VAC / 24VDC	10A
Rated Breaking Capacity	2500VA
Max Switching Current	10A
Operating Power	0.7W
Contact Resistance	50mΩ Max (Initial)
Electrical	10 ⁵ Operations
Mechanical	10 ⁶ Operations

COIL DATA

at 25°C

Coil Power 1.1W



Nominal Voltage (VDC)	Pick-up Voltage (VDC)	Coil Resistance (Ω ±10%)
6	5	30
12	10	150
18	15	390
24	20	500
48	40	2250
115	90	10000
230	190	30000

CHARACTERISTICS DATA


Contact Resistance	>500MΩ @ 500VDC, 25°C, RH 50
Dielectric Strength Between Open Contacts	500VRMS
Between Contacts and Coil	2000VRMS
Operate Time	20ms (Max)
Release Time	10ms (Max)
Temperature Range	-40°C to +70°C
Weight	Approx 110g

Nominal Voltage (AC)	Pick-up Voltage (AC)	Coil Resistance (Ω ±10%)
6	5	4
12	10	16
18	15	40
24	20	70
48	40	300
115	90	2000
230	190	10000

OUTLINE DIMENSIONS, WIRING DIAGRAM AND LAYOUT

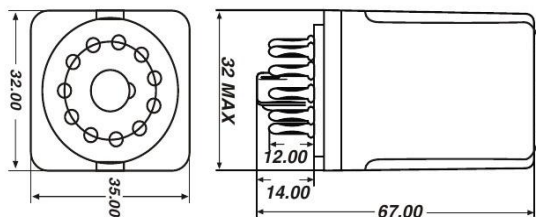

USE WITH 8 PIN SOCKETS



USE WITH 11 PIN SOCKETS

The specifications are for the customer's reference and are subject to change without notice.