


SERIES SWT

PCB Terminal Blocks
Barrier Type



SINGLE WAY TERMINAL (Model: SWT-[C], where C is customized color)

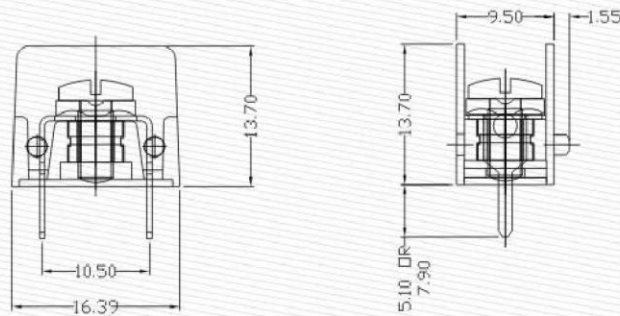

Technical Specifications:

Pitch	: 9.50 mm x 10.50 mm
Rated Current	: 30 A
Rated Voltage	: 300 V
Dielectric Strength	: > 2 kV
Moulded Material	: Polyamide (Nylon) 66-UL 94 VO/V2
Insulation Resistance	: > 1000 M-ohm @ 500 Vdc
Terminal	: Tin plated copper alloy
Washer	: Tin plated copper alloy
	: M4 - BA
Screw	: Brass Tin plated (professional grade) - P
	: MS Trivalent Zinc plated (commercial grade) - C
Wire Size	: 2.5 mm ²
Maximum Torque	: 0.50 - 0.60 Nm

Approval Data

UL	: 300V / 15A / 26-12 AWG
cUL	: 300V / 15A / 26-12 AWG
CE	: 300V / 24A / 26-12 AWG