


PCB Terminal Blocks  
Pluggable Design

COM STRAIGHT FEMALE  
(Model: COM ST/'n'-F [F] where n=number of ways)



Wire Entry Towards Smooth Wall of Header

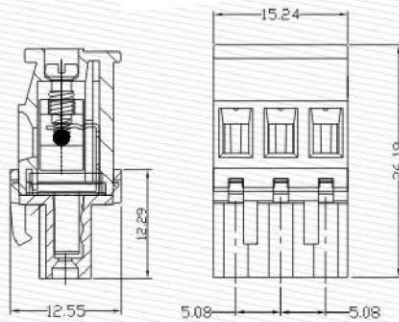

Technical Specifications:

Pitch	: 5.08 mm
Rated Current	: 12 A
Rated Voltage	: 250 V
Dielectric Strength	: > 2 kV
Moulded Material	: Polyamide (Nylon) 66 - UL94 V0 or V2
Insulation Resistance	: > 1000 M-ohm @ 500 Vdc
Terminal	: Tin plated copper alloy
Contact	: Tin plated phosphor bronze
Wire Cage	: Brass Nickel plated
	: M3 x 0.50 mm
Screw	: Brass Tin plated (professional grade) - P
	: MS Trivalent Zinc plated (commercial grade) - C
Wire Size	: 2.5 mm <sup>2</sup>
Maximum Torque	: 0.40 - 0.50 Nm
Approval Data	UL : 250V / 10A / 26-12 AWG
	cUL : 250V / 10A / 26-12 AWG
	CE : 250V / 12A / 26-12 AWG